

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



10/506943  
10/506943

(43) International Publication Date  
18 September 2003 (18.09.2003)


PCT

(10) International Publication Number  
WO 03/077581 A1

- (51) International Patent Classification: H04Q 7/38, (72) Inventors; and  
H04L 29/06 (75) Inventors/Applicants (for US only): GUSTAVSSON, Carl [SE/SE]; Kulgränden 15A:363, S-226 49 Lund (SE). LÖÖF, Gustaf [SE/SE]; Lagerqvist, Byggmästaregatan 8C, S-222 37 Lund (SE). ANDERSSON, Stefan [SE/SE]; Koltrastgränd 23, S-230 41 Klågerup (SE). DAHL, Stefan [SE/SE]; Åldermansgatan 3D, S-227 36 Lund (SE).
- (21) International Application Number: PCT/EP03/01474
- (22) International Filing Date: 14 February 2003 (14.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02005419.3 8 March 2002 (08.03.2002) EP  
02013071.2 13 June 2002 (13.06.2002) EP  
60/390,193 20 June 2002 (20.06.2002) US
- (71) Applicant (for all designated States except US): SONY ERICSSON MOBILE COMMUNICATIONS AB [SE/SE]; S-221 88 Lund (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD,

[Continued on next page]

(54) Title: SECURITY PROTECTION FOR DATA COMMUNICATION

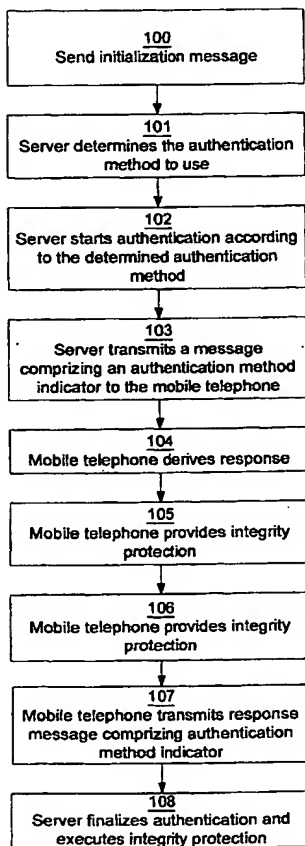

(57) Abstract: According to the method of the invention, authentication of an electronic communication apparatus capable of communicating data messages with a server according to a synchronization protocol, such as SyncML, is provided. The authentication method utilized is specified in messages sent between said apparatus and said server by an authentication method indicator. Depending on the capabilities of the apparatus, the authentication method may be diggerent for different apparatuses. Also, an electronic communication apparatus and a server for carrying out the invention are disclosed.

BEST AVAILABLE COPY

WO 03/077581 A1



SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## SECURITY PROTECTION FOR DATA COMMUNICATION

### Field of the Invention

5       The present invention relates to protocols for communication of data messages between electronic apparatuses. More particularly, the present invention relates to a method for providing authentication and integrity protection when a synchronization protocol for  
10 data communication is utilized for communication of data between e.g. a client and a server. Also, the present invention relates to a server and client adapted to provide authentication and integrity protection according to the method of the invention.

15

### Description of the Related Art

In some situations it is preferred to communicate data between a client and a server using a standardized synchronization protocol. By utilizing the synchronization  
20 protocol it is possible to provide data communication between electronic apparatuses from different manufacturers. With the SyncML initiative a standardized data synchronization protocol is provided, which facilitates communication of data between user apparatuses  
25 of different manufacturers. Examples of a client as disclosed above is an electronic communication apparatus such as a mobile telephone, a pager, an electronic organizer, a smartphone or the like.

One example of a situation where this possibility is  
30 useful is when a device management session is to be established between an apparatus and a server using a synchronization protocol such as e.g. SyncML (SyncML-DM (SyncML-Device Management) or SyncML-DS (SyncML-Data Synchronization)). If there are any problems with the  
35 apparatus it can be connected to the server through a wire or wireless communication link. By connecting the apparatus

to the server, a remote repairer can get access to the apparatus through the connection. However, the repairer may want to authenticate the apparatus before he/she starts repairing the apparatus. Also, in another situation the apparatus may need to verify an authentication made by a repairer to avoid unauthorized access to the user apparatus by a third party, such as a hacker.

Further, in many situations it is also preferred to provide integrity protection of the data sent between the communication apparatus and the server.

In the SyncML-DM specification the following security mechanisms are specified:

- Server authentication
- Client authentication
- Integrity protection
- (Confidentiality)

In the known art security protection, i.e. said security mechanisms, is based on the use of a combination of transport level and SyncML level security as indicated in Table 1 of Fig. 3, which shows security mechanisms per protocol layer. As should be noted, confidentiality is mentioned in the Sync ML specification. However, it is not a requirement for the SyncML-DM.

From table 1 of Fig. 3 it can be concluded that there are strong requirements for client authentication and integrity protection at SyncML level since there are scenarios where there are no alternatives, such as with a SyncML protocol combined with an Obex transport protocol and a Cable or IrDa bearer layer. Also, server authentication and confidentiality are useful but not essential.

Presently, the SyncML specification specifies an authentication protocol that can be used for both client and server authentication.

The main problem with SyncML security is that it is based on a combination of username and password. This has two major disadvantages as it gives weak security and it forces the user to handle yet another password. Also, it is difficult to generate good integrity protection keys from a password, as the entropy of a password is too small. 40-128 random bits is normal for generating a good integrity key. Using a password, this would require 50-70 symbols in a password typed on a keyboard to derive a sufficiently amount of random bits.

#### **Summary of the Invention**

It is an object of the invention to provide a flexible method for providing at least client authentication, when a synchronization protocol such as SyncML-DM/DS is utilized for communicating messages between the client and a server. More specifically, it is an object of the invention to provide client authentication in a more flexible manner than previously known wherein neither username nor password is necessary. Yet another object is to execute client authentication based on the specific authentication capabilities of the client. Also, it is an object of the invention to provide integrity protection, in addition authentication, using good integrity protection keys. It is preferred to render possible the use of a number of different known authentication methods to be used with the synchronization protocol. Finally, it is an object of the invention to also provide server authentication in addition to client authentication and integrity protection.

The above objects are achieved in that an authentication protocol of the synchronization protocol is utilized for providing an authentication method indicator (AMI). The AMI are incorporated in a meta command of the synchronization protocol for indicating the specific type of authentication method used in each particular case. The

authentication method may be preset, or individually determined by the server based on an initialization message sent by the apparatus for indicating e.g. its authentication capabilities, and establishing a connection.

- 5 Any data relating to the determined authentication method are incorporated in a data string of the protocol when messages are communicated.

According to the invention, it is a further object to provide a client, such as an electronic communication  
10 apparatus, adapted to provide at least client authentication when the synchronization protocol is used for communicating messages to the server.

According to the invention, the above objects are achieved by an electronic communication apparatus adapted  
15 to indicate e.g. its authentication capabilities to the server in an initialization message. Further, the apparatus is adapted to execute authentication according to the authentication technique indicated by the AMI of a message received from the server. Also, the apparatus is adapted to  
20 generate a response to the message to be transmitted to the server. For providing integrity protection, the apparatus is adapted to generate good integrity protection keys according to the indicated method.

A further object of the invention is to provide a  
25 server adapted to provide at least client authentication using any of a number of known authentication techniques based on the authentication capabilities of the apparatus.

The above objects are achieved by a server adapted to receive the initialization message (for client  
30 authentication) or send an initialization message (for server authentication). The server is adapted to determine the specific authentication method to be used based on the authentication capabilities of the apparatus. Further, the server is adapted to execute authentication according to  
35 the determined authentication method or according to a

preset authentication method, which is incorporated in the AMI of the message. Also, the server is adapted to incorporate any authentication data relating to the specified authentication method in a data string of the message. To provide integrity protection, the server is adapted to generate an IK according to the authentication method/scheme used.

A further aspect of the invention is to utilize good integrity keys (IK) generated by the server and client, respectively, which will provide integrity protection in addition to authentication. The integrity key is generated according to the authentication scheme used or separately by the server or the client. The authentication method/scheme may be GSM SIM, UMTS USIM, SecureId, Safeword, WPKI, WIM, etc. Further, USIM authentication have the advantage of providing mutual authentication, i.e. server authentication and client authentication in addition to integrity protection.

The method according to the invention has the advantage of being flexible, as more than one authentication method may be used when the SyncML-DM/DS protocol is utilized for transmitting data messages between the apparatus and the server. Also, now user name or user identity is necessary for carrying out client and/or server authentication. Further, good integrity keys may be derived from the authentication scheme to provide integrity protection independently from any user name or user id. By utilizing the method of the invention, anti-replay protection may be provided without the need for synchronized counters in both client and server.

Further preferred features of the invention are defined in the dependent claims.

It should be emphasized that the term "comprises/comprising" when used in this specification is

taken to specify the presence of stated features, integers, steps, components or groups thereof.

### **Brief Description of the Drawings**

5 Preferred embodiments of the present invention will now be described in more detail with reference to the accompanying drawings, in which:

Fig. 1 shows a mobile telephone connected to a number of servers, which are adapted to provide authentication according to the invention;

10 Fig. 2 is a flow chart of an exemplifying authentication process according to the invention;

Fig. 3 is a table showing security mechanisms per protocol layer;

15 Fig. 4 illustrates variables and the message flow between an electronic user equipment and a server in a SIM authentication scenario; and

Fig. 5 illustrates variables and the message flow between an electronic user equipment and a server in a USIM authentication scenario.

### **Detailed Description of Embodiments**

The present invention provides a method for client authentication and integrity protection of communicated data between e.g. a client, such as an electronic user apparatus, and a server when a standardized synchronization protocol such as SyncML-DM/DS is used.

20 A mobile telephone 1 is an example of an electronic user apparatus. For convenience, reference will therefore be made to a mobile telephone 1 throughout this description. However, this is only for exemplifying purposes and is not considered to limit the scope of the invention.



An exemplary mobile telephone 1 comprising in a normal fashion a display 10, a keypad 11, a loudspeaker 12, and a microphone 13 is shown in Fig. 1. The components together form a man-machine interface, through which a user of the mobile telephone 1 may interact with and operate the mobile telephone 1. Further, the mobile telephone 1 comprises an antenna 14 for establishing a wireless communication link 20 with a mobile telecommunication network 21. The mobile telecommunication network 21 may e.g. be a GSM network ("Global System for Mobile communications") or a UMTS network ("Universal Mobile Telephone System"). The mobile telephone 1 is adapted to communicate data through the mobile telecommunication network 21 using a standardized synchronization protocol such as SyncML-DM/DS. Data can be communicated through a wire based or wireless connection 30 between the mobile telephone 1 and a server 31 connected to the telecommunication network 21.

Moreover, the mobile telephone 1 of the embodiment shown in Fig. 1 comprises an infrared interface 15, such as an IrDA port, by means of which the mobile telephone 1 may be connected through a infrared link 40 to a second server 41 for communicating data using a synchronization protocol, such as SyncML-DM/DS.

The mobile telephone 1 also comprises a system or accessories connector 16, by means of which the mobile telephone 1 may be connected, through e.g. a serial cable 50, to a third server 51, for communicating data using a synchronization protocol, such as SyncML-DM/DS.

Additionally, the mobile telephone 1 comprises a second antenna 17 for establishing a short-range radio link 60, such as a Bluetooth link, to a fourth server 61, for communicating data using a synchronization protocol.

As is understood, not all mobile telephones 1 of the invention have all the above mentioned communication

possibilities for communicating data, but can have one or more in different embodiments. Also, the server may be embodied as a pc (personal computer), or another electronic user apparatus adapted to communicate data according to a synchronization protocol, such as SyncML-DM/DS.

At SyncML level of data transmission between the mobile telephone 1 and the server 31, 41, 51, 61 authentication is provided by utilizing the SyncML-DM/DS protocol for carrying information of the authentication method to be used, such as SIM/USIM authentication, which will be further disclosed below. According to the invention, a number of different authentication methods may be utilized when the SyncML-DM/DS protocol is used for communicating messages. The authentication method to be used is specified according to the same principals as in the existing SyncML-DM/DS authentication protocol, although in a much more flexible manner. For signaling the authentication method being used an authentication indicator (AMI), sometimes referred to as the mechanism, is provided when the SyncML-DM/DS protocol is utilized. The AMI substitutes the authentication directive of the meta command of the conventional SyncML-DM/DS protocol when data is communicated according to the SyncML-DM/DS protocol. Further, any data relating to the specific authentication method utilized is incorporated in a data string of the message sent according to the SyncML-DM/DS protocol.

In one embodiment of the invention GSM SIM or UMTS USIM authentication and integrity protection is utilized. This provides authentication of the mobile telephone 1 and integrity protection of data sent between said telephone 1 and the server 31, 41, 51, 61. Also, USIM authentication provides the additional possibility of server authentication. As should be noticed, other authentication techniques are equally well possible, such as PKI based schemes, e.g. WPKI and WIM, and proprietary authentication

token technology, e.g. SecureId or Safeword as the authentication method.

The AMI is a variable indicating the algorithm(s) used to produce the message digest of the message being sent using the SyncML-DM/DS protocol, and the specific authentication method, which is to be specified. The value of the AMI depends on the authentication method used. As is indicated above, the mobile telephone 1 may be adapted to execute authentication according to one or more authentication methods.

In the following, an exemplary embodiment according to the invention will be presented, wherein the message flow between the mobile telephone 1 and the server 31, 41, 51, 61 is disclosed. In the exemplary embodiment, SIM/USIM authentication and integrity protection will be described with reference to Figs. 2, 4, and 5.

At a first step 100 of Fig. 2, an initializing message, indicated as "Initial L3 message" in Figs. 4 and 5, is sent from the mobile telephone 1 to the server 31, 41, 51, 61. The general purpose of the initialization message is to establish a connection between the mobile telephone 1 and the server 31, 41, 51, 61. Also, said message may comprise other information, such as information of the type of device that sent the initialization message, and the identity of the mobile telephone 1 such as IMSI (international mobile subscriber identity) and Ki (subscriber authentication key). The AMI, or a list of AMIs for indicating more than one authentication capability, can be incorporated in the initialization message for indicating the authentication capabilities of the mobile telephone 1. As should be noted, the server 31, 41, 51, 61 may also initiate the establishing of a connection between said server and the mobile telephone 1. This is executed in that the server 31, 41, 51, 61 transmits a server initialization message to the mobile telephone 1, whereupon

said telephone 1 transmits the initialization message when the server initialization message is received.

Depending on e.g. the type of device sending the first message, type of data bearer and transport protocol the server 31, 41, 51, 61 determines at step 101 the security level and type of security mechanism, such as SIM/USIM authentication, to be used. However, the security mechanism may equally well be preset, wherein the server 31, 41, 51, 61 does not need to determine the authentication capabilities of the mobile telephone 1. In this embodiment, the server 31, 41, 51, 61 determines that the mobile telephone 1 capable of performing SIM/USIM authentication sent the message. Therefore, the server 31, 41, 51, 61 starts SIM/USIM authentication at 102 by transmitting an authentication request comprising the subscriber identity (IMSI, Ki) to an AUC (authentication center) for deriving authentication variables (AVs), possible via a home location register (HLR). Based on the IMSI, the AUC generates authentication data, such as a challenge, which in this embodiment is a random number, or obtains a stored challenge based on the IMSI. Also, the AUC generates an XRES (expected result), based on the challenge and the Ki, or obtains a stored XRES by means of the IMSI. The XRES will be used in a later step for finalizing the authentication.

In an alternative embodiment, the AUC also generates an CK/IK (cipher key/integrity key) based on the Ki and the challenge, which can be stored together with the XRES and the authentication data at the AUC and/or the server 31, 41, 51, 61 and utilized for integrity protection.

At step 103, the authentication data, XRES and CK/IK are then transmitted to the server, which is adapted to transmit the authentication data to the mobile telephone 1 in the data string of the message according to the SyncML-DM/DS protocol. Also, the value of the AMI, indicating the

type of security mechanism used for generating the authentication data, XRES and CK/IK for authentication and integrity protection, i.e. SIM/USIM authentication in this embodiment, is incorporated into the message sent to the mobile telephone 1, as disclosed above.

After receiving the AMI and the authentication data the mobile telephone determines the authentication method to be used by evaluating the AMI and performs the steps necessary according to the specific authentication method to create a response to be sent to the server 31, 41, 51, 61. Alternatively, the authentication method may be predetermined. As the steps necessary for executing SIM/USIM authentication at the mobile telephone 1 form no essential part of the invention per se, it will only be disclosed briefly in the following.

In the exemplifying embodiment, the mobile telephone 1, at step 104, generates a response by transmitting the authentication data to the SIM/USIM of the mobile telephone 1. The SIM/USIM generates, based on the Ki of the subscription stored on the SIM/USIM and the authentication data, a response corresponding to the XRES stored in the server.

In an alternative embodiment, integrity protection is also provided at step 105 if required. Therefore a shared secret key is required. In the embodiment where SIM/USIM is used as the authentication scheme, integrity protection using the CK/IK as good integrity keys is possible. Therefore, the mobile telephone 1 requests a CK/IK from the SIM/USIM, which generates a second integrity key based on the Ki and the value of the authentication data. Consequently, executing an authentication procedure, such as the GSM authentication procedure, or the UMTS AKA, which per se are believed to be known to the man skilled in the art, provides the CK/IK. As is also understood, the CK of

GSM authentication is used as an integrity key correspondingly to the IK of UMTS authentication.

A hashing function, such as SHA-1 or MD5, can be utilized by the mobile telephone 1 for the integrity protection in the alternative embodiment. A value of a MAC parameter is computed as per RFC2104, with SHA-1 as its hashing function. However, other hashing functions may also be used according to the method of the invention. The computation of the MAC value relies upon the use of a shared secret (or key). Therefore, according to the invention, the CK/IK generated by the SIM/USIM is utilized for the integrity protection, as is well known in the art. Also, a HMAC is computed on the entire SyncML-DM/DS message. Each SyncML-DM/DS message is constructed as normal, upon completion of the message the HMAC is computed. The HMAC is located in the header of the transport protocol, e.g. HTTP, WAP, or OBEX, called x-syncml-hmac, during transmission of the message.

When the response is derived, and possibly the MAC and HMAC, the response is incorporated in the data string of the SyncML-DM/DS authentication protocol. Also, the AMI indicates the authentication method used, and the response message is transmitted from the mobile telephone 1 to the server 31, 41, 51, 61 at step 107. Upon reception, the server 31, 41, 51, 61 at step 108 begins the integrity control and finalizes authentication according to the authentication method specified by the AMI.

For finalizing the authentication according to SIM/USIM authentication, the server 31, 41, 51, 61 compares the response value with the value of the stored XRES for authentication control. If integrity protection is provided, the server also generates a MAC value based on the response message and the CK/IK received from the AUC to be compared with the value of the MAC sent in the data string of the SyncML-DM/DS protocol. As integrity

protection per se is not an essential part of the invention, the generation of MAC values and the comparing of said values is not further disclosed here.

If USIM authentication is utilized, the mobile  
5 telephone 1 may transmit a user authentication reject to the server 31, 41, 51, 61 if the authentication fails, as is indicated in Fig. 5.

In an alternative embodiment, the use of USIM authentication also provides the possibility of server  
10 authentication in addition to client authentication. The difference between the embodiment providing server authentication and the embodiments described above is that an additional server authentication variable AUTN (authentication token) is generated by the authentication  
15 center in addition to the challenge, CK/IK and XRES. The AUTN variable will be transmitted to the mobile telephone 1 in the data string of the message incorporating the authentication data. Also in this embodiment the AMI is used for indication the type of authentication method  
20 utilized. When the mobile telephone 1 receives the AUTN variable, it will pass it on to the USIM, which will perform server authentication in addition to generating the response.

In other embodiments of the invention, other  
25 authentication techniques can be utilized, which will be indicated by different AMI values comprised in the message, as set out above. In each embodiment, the authentication data necessary for performing authentication, such as certificates or codes, can be transmitted from the server  
30 31, 41, 51, 61 to the mobile telephone 1 by utilizing the data string of the message sent according to the SyncML-DM/DS protocol.

In the following PKI based WIM authentication and integrity protection will be described briefly. In WIM  
35 authentication the initialization message is sent from the

mobile telephone 1 to the server 31, 41, 51, 61,  
correspondingly to SIM/USIM authentication. Then the server  
determines, if necessary, the capabilities of the mobile  
telephone, wherein WIM authentication is determined as the  
5 authentication method to utilize. Then, the server  
generates the AMI and a challenge to be transmitted to the  
mobile telephone according to the same principles as has  
been described above. When the mobile telephone 1 receives  
the authentication parameters, i.e. the AMI and the  
10 challenge, the mobile telephone 1 transmits the challenge  
to the WIM of the mobile telephone 1, which as a result  
generates a response in the form of a certificate, which is  
stored in the WIM. A certificate authority, as is well  
known to the man skilled in the art, issues the  
15 certificate. The response is then transmitted to the server  
according to the same principles as in the previous  
embodiments. The result may be encrypted using a public key  
of the server. Finally, when the server receives the  
result, said server will if necessary decrypt the message  
20 using the private key of the server 31, 41, 51, 61 and  
authenticate the response (certificate) by transmitting an  
authentication request to a certificate authority (CA).

In the authentication procedure, the server 31, 41,  
51, 61 will derive the public key of the mobile telephone 1  
25 from the CA. The public key of the mobile telephone may be  
utilized for providing integrity protection if preferred.  
If so, the server 31, 41, 51, 61 will generate a good IK  
based on random numbers, which is incorporated in a message  
encrypted using the public key of the mobile telephone 1.  
30 An hashing algorithm, as described above, is used on the  
encrypted message, whereupon the message is encrypted with  
the private key of the mobile telephone. The mobile  
telephone 1 will receive the encrypted message, decrypt it  
using the public key of the server, a hashing algorithm,



and the private key of the mobile telephone 1 for finalizing the integrity protection.

Other possibilities of integrity protection when WIM based authentication are utilized. One example is to  
5 provide the encrypted IK together with the challenge in the data string of the first message sent from the server 31, 41, 51, 61 to the mobile telephone 1, which will be incorporated in the data string of the message.

As is mentioned above, also Safeword and SecureId are  
10 possible to use as the authentication method. These methods may be used according to the same principles as described in relation to the above embodiments and according to the following dependent and independent claims. Therefore, these authentication methods will not be described in any  
15 further detail, as messages will flow between the mobile telephone 1 and the server 31, 41, 51, 61 using the SyncML-DM/DS protocol having a AMI for indicating the authentication method and a data string for carrying any authentication data.

20 As an option, the authentication data can be used to prevent replay attacks. In 3GPP the server, 31, 41, 51, 61 can e.g. use the equivalent of the AKA FRESH parameter as the value of the authentication data. This value, together with the parameter-nonce count is used for full anti-replay  
25 protection.

The method has been described as providing an authentication method indicator (AMI) and utilizing a data string for carrying authentication data, which relates to the specific authentication method used, in a message to be  
30 sent according to a synchronization protocol, such as the SyncML-DM/DS protocol. However, it should be noted that the method is not limited to the SyncML-DM/DS protocol. It is equally well possible to implement the method of the invention also below the SyncML layer in transport  
35 protocols such as http or Obex.

**CLAIMS**

1. A method for providing authentication when  
5 messages are sent between an electronic communication  
apparatus (1) and a server (3, 41, 51, 61) according to a  
synchronization protocol, **characterized in that** an  
authentication method indicator (AMI) is incorporated in an  
authentication protocol of the synchronization protocol,  
10 wherein said AMI specifies an authentication method  
according to which the authentication is executed.

2. The method according to claim 1, wherein the AMI is  
incorporated in the meta command of the synchronization  
15 protocol and based on the authentication capabilities of  
the apparatus (1).

3. The method according to claim 1 or 2, wherein at  
least one authentication capability of the electronic  
20 communication apparatus is indicated in an authentication  
method list of an initialization message sent to the server  
(31, 41, 51, 61) for establishing a connection.

4. The method according to any of the previous  
25 claims, wherein any authentication data relating to the  
specified authentication method is incorporated in a data  
string of the synchronization protocol.

5. The method according to any of the previous  
30 claims, wherein the specified authentication method is GSM  
SIM authentication.

6. The method according to any of the claims 1-4,  
wherein the specified authentication method is UMTS USIM  
35 authentication, which also provides server authentication.

7. The method according to any of the claims 1-4, wherein the specified authentication method is WPKI or WIM authentication.

5        8. The method according to any of the claims 1-4, wherein the specified authentication method is SecureId or SafeWord authentication.

10       9. The method according to any of the claims 3-7, wherein the server (31, 41, 51, 61) determines the authentication capabilities of the electronic communication apparatus (1) based on the at least one authentication method listed in the authentication method list.

15       10. The method according to claim 9, wherein the server (31, 41, 51, 61) executes any necessary authentication steps according to one of the at least one authentication methods indicated in the authentication method list, and prepares and transmits a message to the  
20       electronic communication apparatus (1), comprising the AMI and any authentication data relating to the specified authentication method, in the data string of the message.

25       11. The method according to claim 10, wherein the electronic communication apparatus (1) receives the message, executes any necessary authentication steps according to the authentication method indicated by the AMI to generate an expected result, and prepares and transmits a response to the server, comprising the AMI, and any  
30       authentication data in the data string of the message.

35       12. The method according to any of the claims 1-6 and 9-11, wherein integrity protection is provided by utilizing CKs/IKs (cipher keys/integrity keys) generated by the electronic communication apparatus (1) and the server (31,

41, 51, 61), respectively, when SIM/USIM authentication is executed, which CK/IK is used for generating MAC values and using a hashing function for computing a HMAC on the entire message to be sent.

5

13. The method according to any of the claims 7 or 9-11, wherein integrity protection is provided in that the server generates a good integrity key, which is encrypted with the public key of the electronic communication apparatus (1), which is generated during the authentication procedure, said integrity key is sent to said apparatus (1), and utilized for generating MAC values and using a hashing function for computing a HMAC on the entire message to be sent.

15

14. The method according to claim 12 or 13, wherein the MAC value is computed as per RFC2104.

15. The method according to any of the claims 12-14, wherein the method utilizes SHA-1 as the hashing function.

20

16. The method according to any of the previous claims, wherein the protocol is the SyncML-DM protocol or the SyncML-DS protocol.

25

17. The method according to any of the previous claims, wherein the protocol is the Obex, http, or WSP protocol.

30

18. An electronic communication apparatus adapted to provide authentication when messages are exchanged with a server according to a synchronization protocol, **characterized in that** the apparatus is further adapted to incorporate an authentication method indicator (AMI) in the authentication protocol of the synchronization protocol for

35

indicating a specific type of authentication method,  
according to which the authentication is executed.

19. The apparatus according to claim 18, wherein the  
5 apparatus (1) is further adapted to send an initialization  
message to the server for establishing a connection, which  
message indicates the authentication capabilities of the  
apparatus.

10 20. The apparatus according to claim 19, wherein the  
initialization message comprises an authentication method  
list having at least one authentication method listed, type  
of apparatus, and/or identity of the apparatus (1).

15 21. The apparatus according to claim 18, wherein the  
apparatus (1) is further adapted to determine the type of  
authentication method to use from the authentication method  
indicator of a message received from the server (31, 41,  
51, 61).

20 22. The apparatus according to any of the claims 18-  
21, wherein the apparatus (1) is further adapted to execute  
any of the steps necessary according to the specified  
authentication method.

25 23. The apparatus according to claim 22, wherein the  
apparatus (1) is further adapted to incorporate any  
authentication data in a data string of the message to be  
sent according to the synchronization protocol.

30 24. The apparatus according to any of the claims 18-  
23, wherein the apparatus (1) is further adapted to provide  
integrity protection by utilizing an IK (integrity key) for  
generating a MAC, and utilizing a hashing function for  
35 computing a HMAC on the entire message.

25. The apparatus according to claim 24, wherein the apparatus (1) is adapted to compute the MAC value as per RFC2104.

5

26. The apparatus according to claim 24 or 25, wherein the apparatus (1) is further adapted to utilize SHA-1 as the hashing function.

10

27. The apparatus according to any of the claims 18-26, wherein the protocol is the SyncML-DM protocol or the SyncML-DS protocol.

15

28. The apparatus according to any of the claims 18-26, wherein the protocol is the Obex, http, or WSP protocol.

20

29. The apparatus according to any of the claims 18-28, wherein the apparatus (1) is further adapted to utilize GSM SIM authentication as the authentication method.

25

30. The apparatus according to any of the claims 18-28, wherein the apparatus (1) is adapted to utilize UMTS USIM authentication as the authentication method and provide server authentication.

30

31. The method according to any of the claims 18-28, wherein apparatus (1) is further adapted to utilize SecureId, SafeWord, WPKI or WIM authentication as the authentication method.

35

32. The apparatus according to any of the claims 18-31, wherein the apparatus is a pager, an electronic organizer, or a smartphone.

33. The apparatus according to any of the claims 18-31, wherein the apparatus is a mobile telephone (1).

34. A server adapted to provide authentication when  
5 messages are exchanged with an apparatus (1) according to a synchronization protocol, **characterized in that** the server (31, 41, 51, 61) is further adapted to incorporate an authentication method indicator (AMI) in the authentication  
10 protocol of the synchronization protocol for indicating an authentication method, according to which the authentication is executed.

35. The server according to claim 34, wherein the server (31, 41, 51, 61) is further adapted to incorporate  
15 any authentication data in a data string of the synchronization protocol.

36. The server according to claim 34 or 35, wherein the server (31, 41, 51, 61) is further adapted to determine  
20 from a received initialization message the authentication capabilities of the apparatus (1) and further determine a specific authentication method to utilize therefrom.

37. The server according to claim 36, wherein the  
25 server (31, 41, 51, 61) is further adapted to execute authentication according to the determined authentication method.

38. The server according to any of the claims 34-37,  
30 wherein the server (31, 41, 51, 61) is further adapted to provide integrity protection by utilizing an IK (integrity key) for generating a MAC, and utilizing a hashing function for computing a HMAC.

39. The server according to claim 38, wherein the server (31, 41, 51, 61) is adapted to derive the MAC value as per RFC2104.

5        40. The server according to claim 38 or 39, wherein the server (31, 41, 51, 61) is further adapted to utilize SHA-1 as the hashing function.

10       41. The server according to any of the claims 34-40, wherein the protocol is the SyncML-DM protocol or the SyncML-DS protocol.

15       42. The server according to any of the claims 34-41, wherein the protocol is the Obex, http, or WSP protocol.

20       43. The server according to any of the claims 34-42, wherein the server (31, 41, 51, 61) is further adapted to utilize GSM SIM authentication as the authentication method.

25       44. The server according to any of the claims 34-42, wherein the server (31, 41, 51, 61) is further adapted to utilize UMTS USIM authentication as the authentication method and provide server authentication variable to the electronic user equipment (1).

30       45. The server according to any of the claims 34-42, wherein server is further adapted to utilize SecureId, SafeWord, WPKI or WIM authentication as the authentication method.



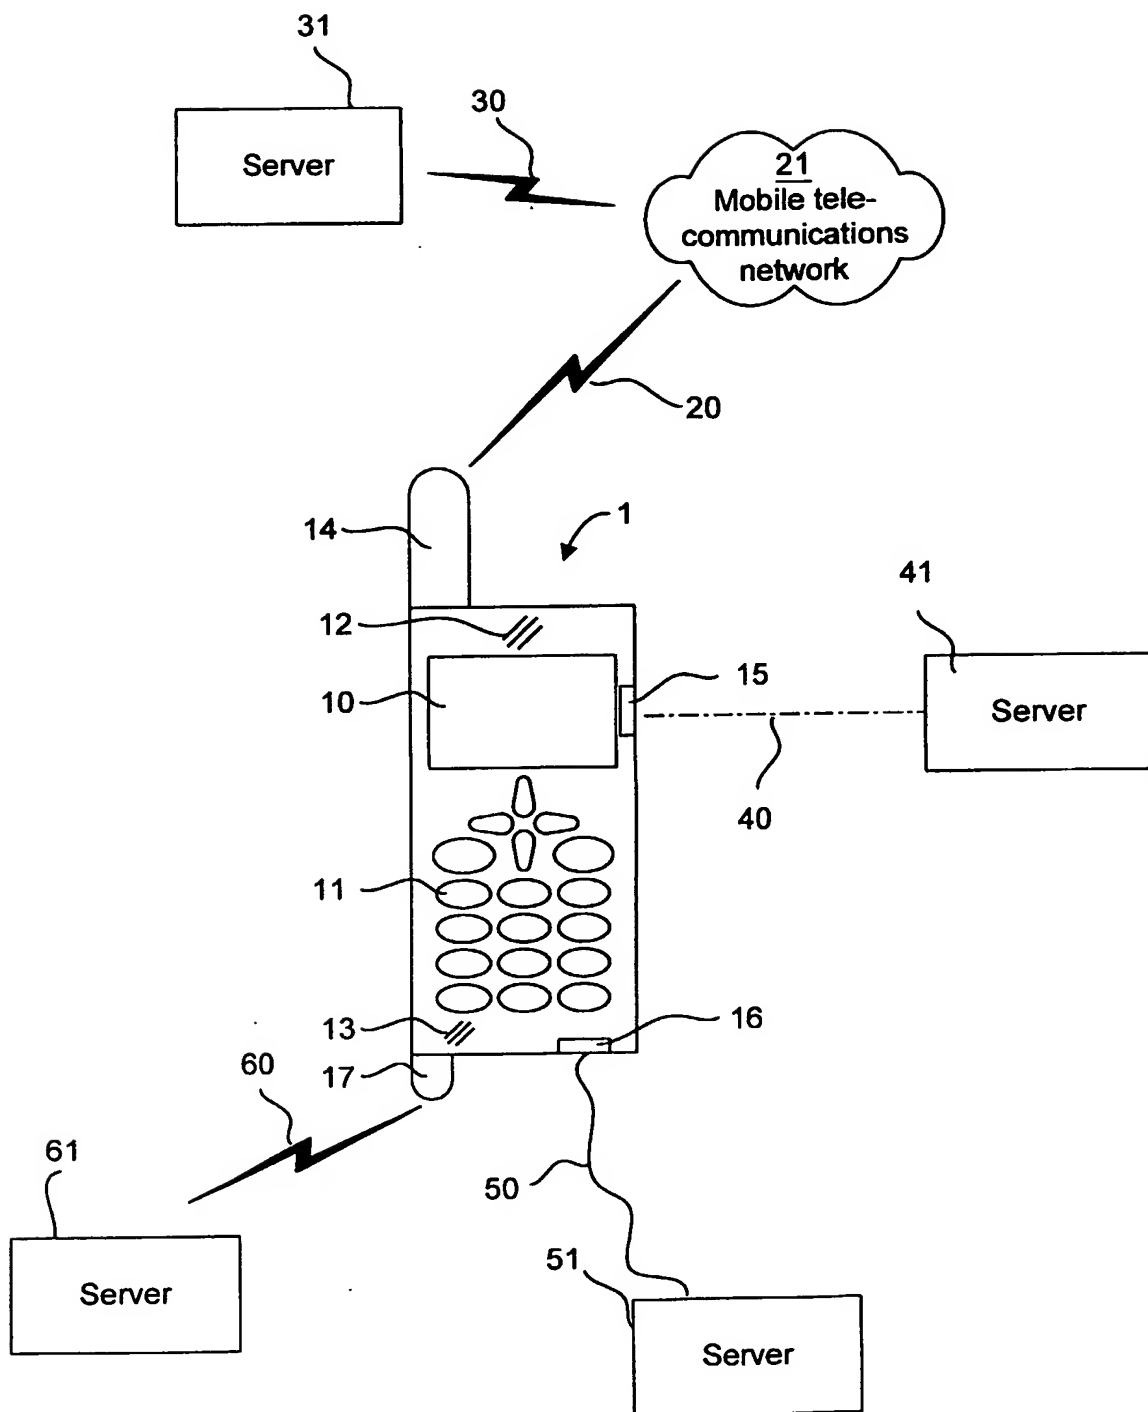


FIG 1

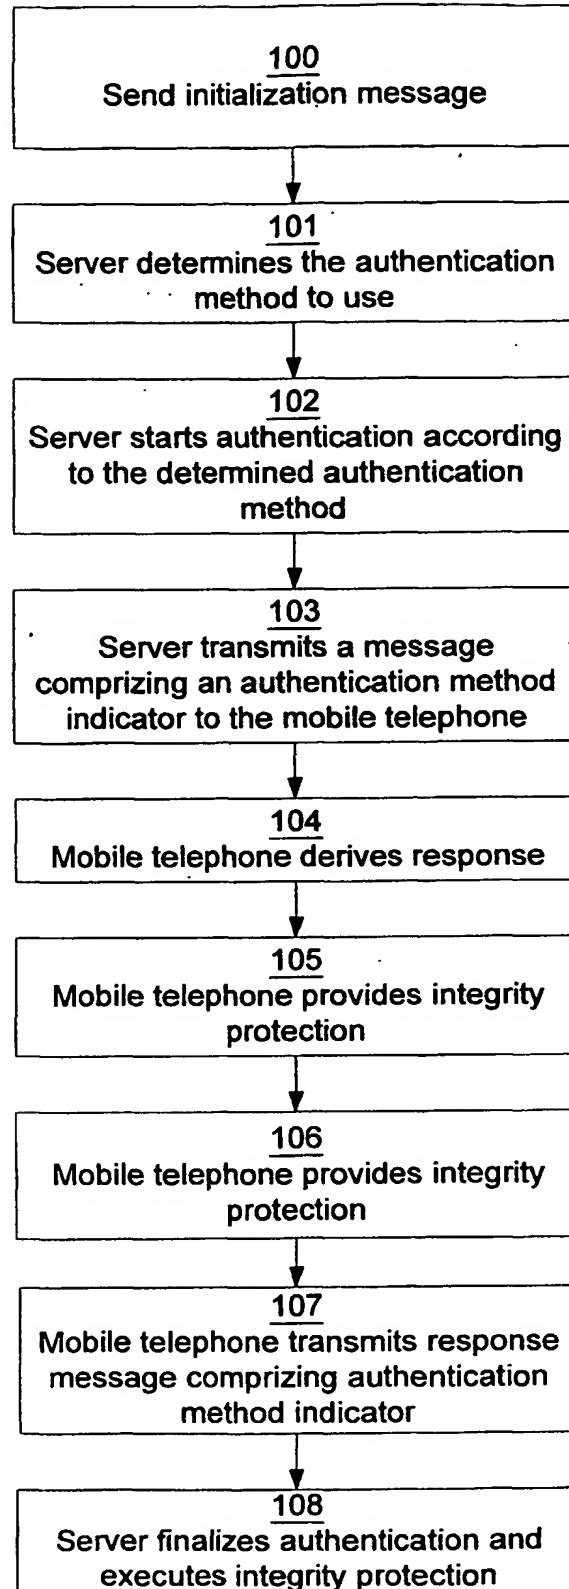


FIG 2

	<b>SyncML/ Http/X</b>	<b>SyncML/ WSP/X</b>	<b>SyncML/ Obex/Cable or IrDa</b>	<b>SyncML/ Obex/ BT</b>
<b>SyncML layer</b>	Client [+ server] authenti-cati on	Client [+ server] authenti-catio n	Client + server authenti-catio n	Client + server authenti-cation + Integrity protection
<b>Transport layer</b>	Server authenti-cat ed TLS	Server authenti-cate d WTLS, i.e. c 2	No require-ments	No require-ments
<b>Bearer layer</b>	No require-men ts	No require-ments	No require-ments	BT ciphering and authenti-cation

Table 1

FIG 3

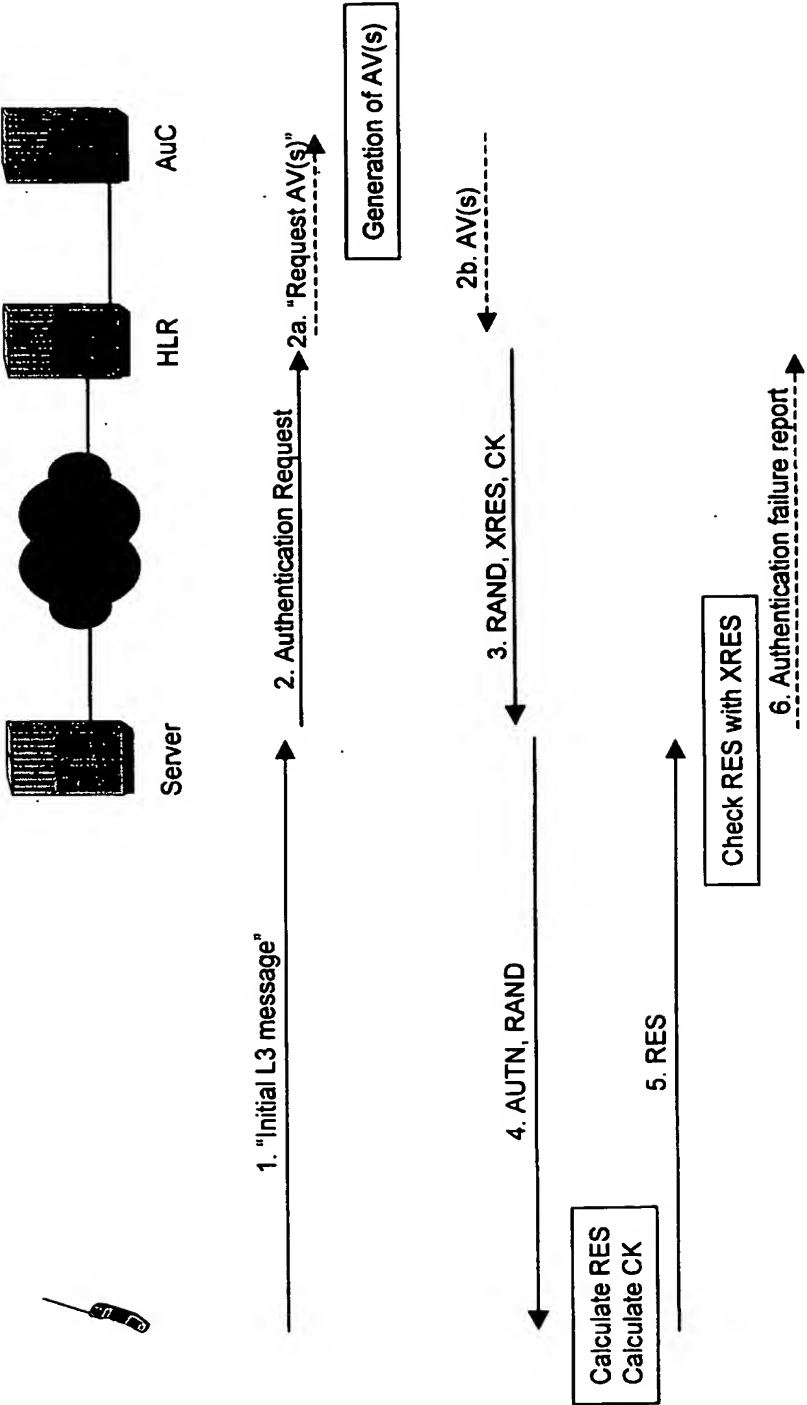


FIG 4

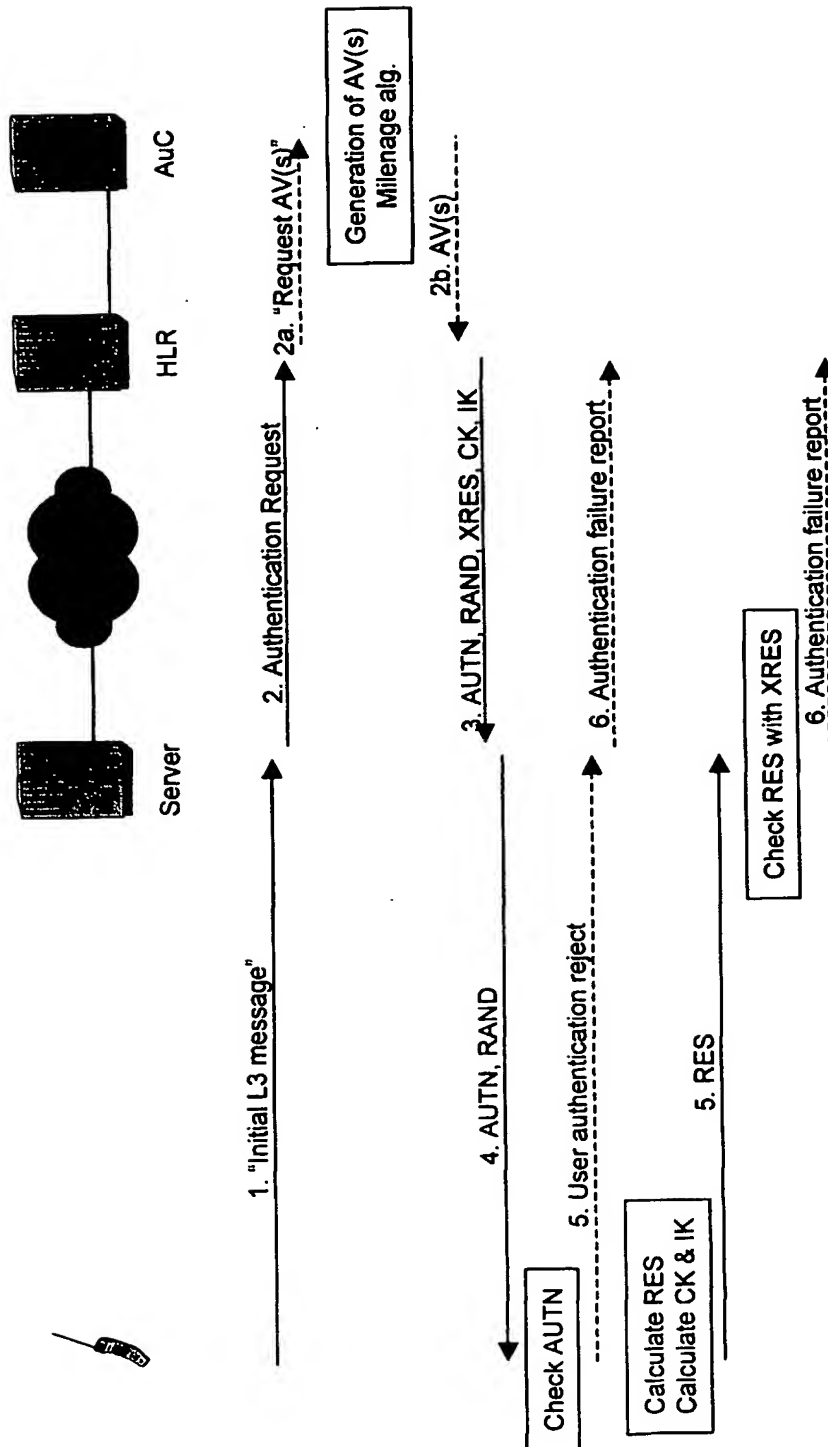


FIG 5

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/01474

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	"SyncML Sync Protocol, version 1.0" SYNCOM CONSORTIUM, 7 December 2000 (2000-12-07), XP002217356 abstract page 7, line 1 -page 8, line 15 page 13, line 37-40 page 20, line 1 -page 24, line 20 page 58, line 12-15; figures 1,2 -----	1, 18, 34
A	"SyncML Device Management Security" SYNCOM CONSORTIUM, 'Online! pages 1-13, XP002227140 Retrieved from the Internet: <URL:http://www.syncml.org/docs/syncml_dm_ sec_v11_20020215.pdf> 'retrieved on 2003-01-14! abstract page 6, line 13 -page 11, line 16 -----	1-45



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

5 August 2003

Date of mailing of the international search report

19/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fantacone, V

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**